



MBRF2035CT THRU MBRF20200CT

Isolation 20.0 AMPS. Schottky Barrier Rectifiers



Voltage Range
35 to 200 Volts
Current
20.0 Amperes


Features

- ✦ Plastic material used carries Underwriters Laboratory Classifications 94V-0
- ✦ Metal silicon junction, majority carrier conduction
- ✦ Low power loss, high efficiency
- ✦ High current capability, low forward voltage drop
- ✦ High surge capability
- ✦ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ✦ Guardring for overvoltage protection
- ✦ High temperature soldering guaranteed: 260°C/10 seconds, 0.25" (6.35mm) from case

Mechanical Data

- ✦ Cases: ITO-220AB molded plastic
- ✦ Terminals: Leads solderable per MIL-STD-750, Method 2026
- ✦ Polarity: As marked
- ✦ Mounting position: Any
- ✦ Mounting torque: 5 in. - lbs. max
- ✦ Weight: 0.08 ounce, 2.24 grams

ITO-220AB

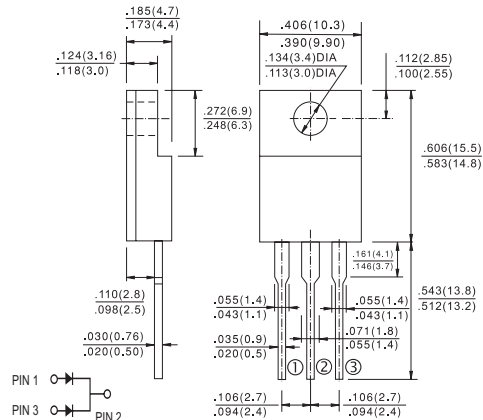

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number	Symbol	MBRF 2035 CT	MBRF 2045 CT	MBRF 2050 CT	MBRF 2060 CT	MBRF 20100 CT	MBRF 20150 CT	MBRF 20200 CT	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	35	45	50	60	100	150	200	V
Maximum RMS Voltage	V_{RMS}	24	31	35	42	70	105	140	V
Maximum DC Blocking Voltage	V_{DC}	35	45	50	60	100	150	200	V
Maximum Average Forward Rectified Current at $T_c=135^\circ\text{C}$ Total device Per Leg	$I_{(AV)}$					20 10			A
Peak Repetitive Forward Current Per leg (Rated V_R , Square Wave, 20KHz) at $T_c=135^\circ\text{C}$	I_{FRM}					20.0			A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}					150			A
Peak Repetitive Reverse Surge Current (Note 1)	I_{RRM}	1.0			0.5				A
Maximum Instantaneous Forward Voltage at (Note 2) $I_F=10\text{A}, T_c=25^\circ\text{C}$ $I_F=10\text{A}, T_c=125^\circ\text{C}$ $I_F=20\text{A}, T_c=25^\circ\text{C}$ $I_F=20\text{A}, T_c=125^\circ\text{C}$	V_F	- 0.57 0.84 0.72		0.80 0.70 0.95 0.85		0.85 0.75 0.95 0.85	0.99 0.87 1.23 1.10		V
Maximum Instantaneous Reverse Current @ $T_c=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_c=125^\circ\text{C}$	I_R	0.1 15.0				0.15 150.0			mA
Voltage Rate of Change, (Rated V_R)	dV/dt					10,000			V/ μs
Typical Thermal Resistance Per Leg (Note 3) $R_{\theta JC}$	$R_{\theta JC}$	1.5			3.5				$^\circ\text{C}/\text{W}$
Typical Junction Capacitance	C_j	400			310				pF
RMS Isolation Voltage (MBRF Type Only) from Terminals to Heatsink with $t=1.0$ Second, $RH \leq 30\%$	V_{ISO}				4500 (Note 4) 3500 (Note 5) 1500 (Note 6)				V
Operating Junction Temperature Range T_J	T_J					-65 to +150			$^\circ\text{C}$
Storage Temperature Range T_{STG}	T_{STG}					-65 to +175			$^\circ\text{C}$

- Notes: 1. 2.0us Pulse Width, $f=1.0$ KHz
 2. Pulse Test: 300us Pulse Width, 1% Duty Cycle
 3. Thermal Resistance from Junction to Case Per Leg, with Heatsink Size (4"x6"x0.25") Al-Plated
 4. Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset.
 5. Clip Mounting (on case), where leads do overlap heatsink.
 6. Screw Mounting with 4-40 screw, where washer diameter is ≤ 4.9 mm (0.19")

RATINGS AND CHARACTERISTIC CURVES (MBRF2035CT THRU MBRF20200CT)

FIG.1- FORWARD CURRENT DERATING CURVE

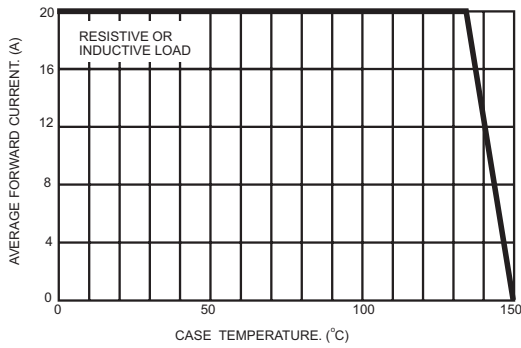


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

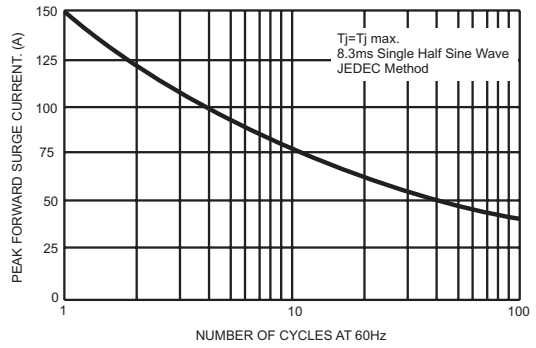


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

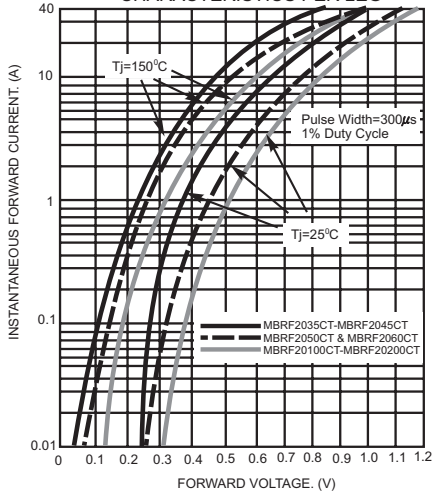


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER LEG

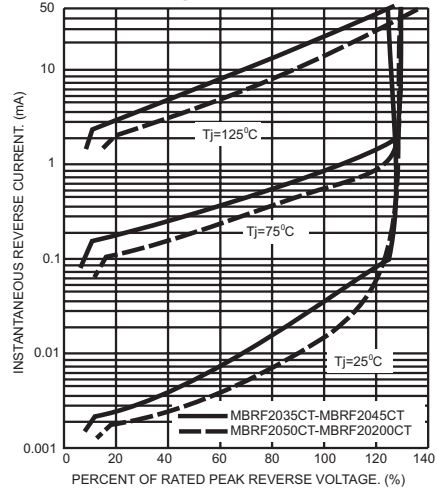


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

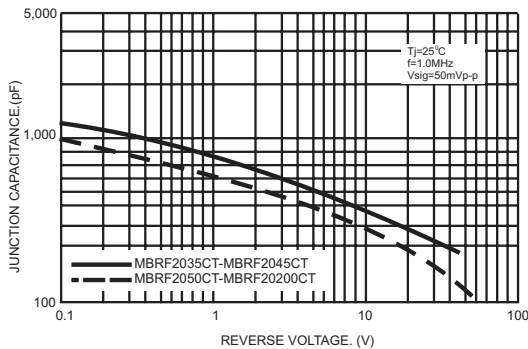


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

