

Part Number: KTIR0621DS


Package Dimensions

Features

- High sensing accuracy.
- High current transfer ratio.
- Both-sides mounting type.
- RoHS Compliant.

Applications

- OA equipment, such as floppy disk drives, printers, facsimiles, etc.
- VCRs.

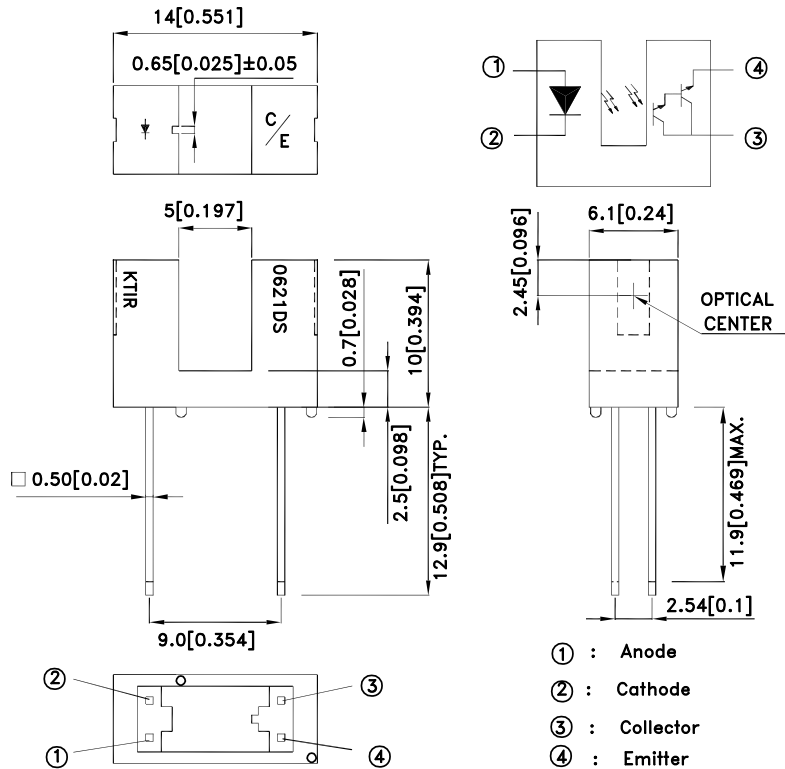

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01)$ " unless otherwise noted.
3. Lead spacing is measured where the leads emerge from the package.
4. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

*Absolute Maximum Ratings(Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	Reverse voltage	V_R	6	V
	Power dissipation	P_d	75	mW
	Peak Forward Current (Pulse Width $\leq 100\mu\text{s}$, Duty Cycle =1%)	I_{FP}	1	A
Output	Collector-emitter voltage	V_{CE0}	35	V
	Emitter-collector voltage	V_{ECO}	6	V
	Collector current	I_C	40	mA
	Collector power dissipation	P_C	75	mW
Operating temperature		T_{opr}	-25~+85	°C
Storage temperature		T_{stg}	-40~+100	°C
soldering temperature (1/16 inch from body for 5 seconds)		T_{sol}	260	°C

*Electro-optical Characteristics(Ta=25°C)

Parameter		Symbol	Conditions	Min.	TYP.	Max.	Unit	
Input	Forward Voltage	V_F	$I_F=20\text{mA}$	1.0	1.2	1.5	V	
	Peak forward voltage	V_{FM}	$I_{FM}=0.5\text{A}$	-	2	3	V	
	Reverse Current	I_R	$V_R=6\text{V}$	-	-	10	μA	
	Peak Wavelength	λ_P	$I_F=20\text{mA}$	-	940	-	nm	
Output	Collector dark current	I_{CEO}	$V_{CE}=10\text{V}$ $I_F=0\text{mA}$	-	-	10^{-6}	A	
Transfer characteristics	Current transfer ratio	CTR	$V_{CE}=2\text{V}$ $I_F=1\text{mA}$	-	200	-	%	
	Collector-emitter saturation voltage	$V_{CE(SAT)}$	$I_F=2\text{mA}$ $I_C=1\text{mA}$	-	-	1.0	V	
	Response time	Rise time	t_r	$V_{CE}=2\text{V}$ $I_C=10\text{mA}$	-	90	400	μsec
		Fall time	t_f	$R_L=100\Omega$	-	80	300	μsec

Fig. 1 Forward Current vs. Forward Voltage

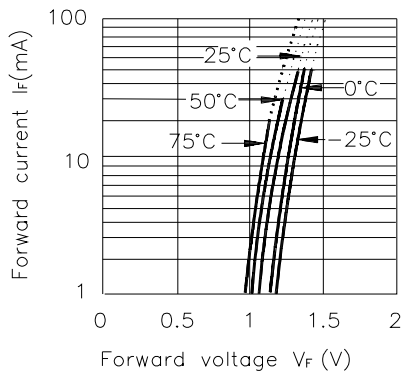


Fig. 2 Collector Current vs. Forward Current

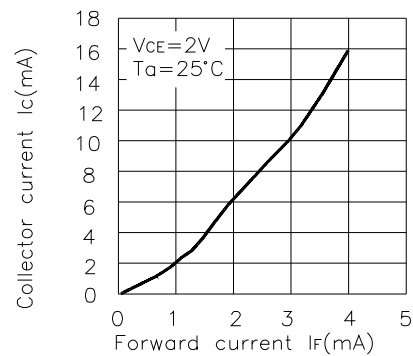


Fig. 3 Collector Current vs. Collector-emitter Voltage

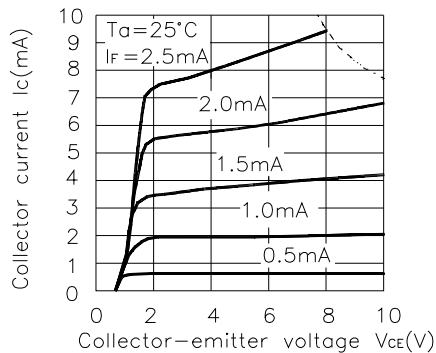


Fig. 4 Collector Current vs. Ambient Temperature

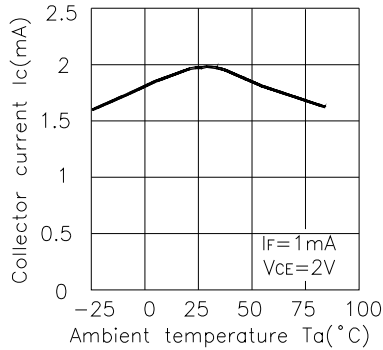


Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature

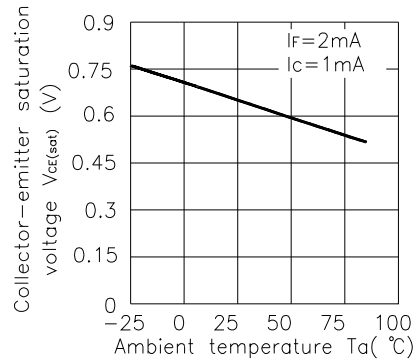


Fig.6 Relative Collector Current vs. Shield Distance (1)

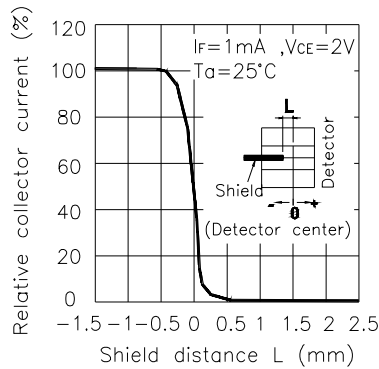


Fig.7 Relative Collector Current vs. Shield Distance (2)



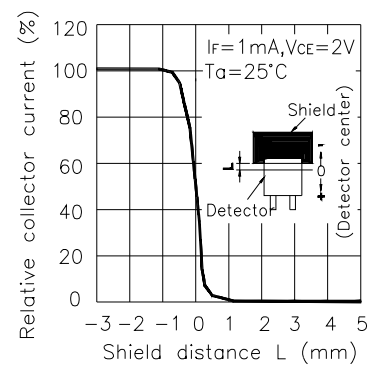


Fig.8 Response Time vs Load Resistance


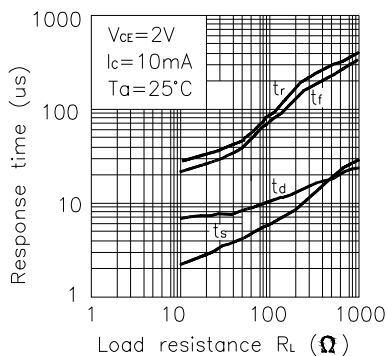


Test Circuit for Response Time

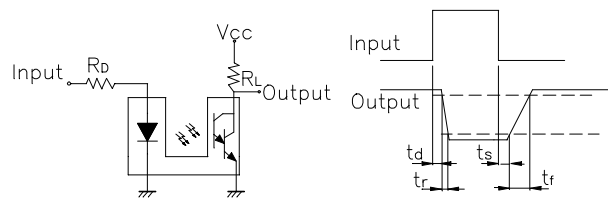

PACKING & LABEL SPECIFICATIONS

KTIR0621DS

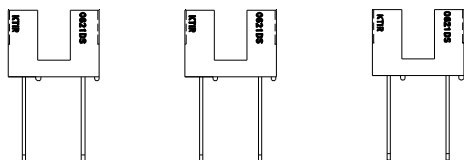


200PCS / BAG



6.4K / 9# BOX

OUTSIDE LABEL

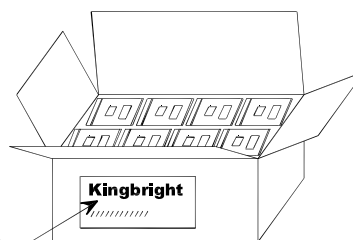

3.2K / 5# BOX

OUTSIDE LABEL

Kingbright

P/NO: KTIRxxx

QTY: 200 pcs

S/N: XXXX

CODE: XXX

Q.C.

QC
XX XX XX
PASSED

LOT NO:



xxxxxxxxxxxxxxxxxxxxxxxx

RoHS Compliant